

Versatile Installation, Easy Maintenance

Wall-mounting/removable floor-standing installation
 Modules: Front maintenance without rear maintenance access
 System box: Pull-out design for easy maintenance

Specification

| Model | LT135 (Touchscreen) |
|-----------------------------------|---|
| Screen Size (inch) | 135 |
| Dimension (mm) | Wall Mounted : 3047*1735*86 Pedestal Mounted : 3047*2238*750 |
| LED Type | COB |
| Resolution (pixel) | 1920*1080 |
| Refresh Rate (Hz) | 3840 |
| Frame Rate (Hz) | 50/60 |
| Brightness (nits) | 100-600 (Adjustable) |
| Brightness Uniformity | 97%/±0.003 |
| Color Temperature (K) | 2000-10000 (Adjustable) |
| Viewing Angle (H/V) | 160° / 160° |
| Voltage (V) | AC100~240 |
| IP Rating | IP30 |
| Weight (Kg) | Wall Mounted : 180/Pedestal Mounted : 220 |
| Average Power Consumption (KW/pc) | 0.53 |
| Max Power Consumption (KW/pc) | 1.6 |
| System | Android (Standard) / Windows(Optional) |
| Audiovisual Interface | AUDIO*1 3.5mm (Output) /SPDIFx1 Optical Fiber Digital Audio/RJ45*1/HDMI 2.0*3/USB 2.0*2 (Front) /USB 2.0*1/USB3.0*1 |

*Above parameters are for reference only. For more details, please contact our sales team. All rights reserved.




Smart Technologies, High-quality Display

COB technology and Micro LEDs for ultra-high contrast ratio
Low-blue-light display to protect users' eyes
Touchable screens with a lower temperature under the same brightness



All-in-one Design, Ultra-thin Frame

All-in-one design for high precision to reach seamless splicing
24 mm ultra-light frame and 44 mm thickness to save your spaces

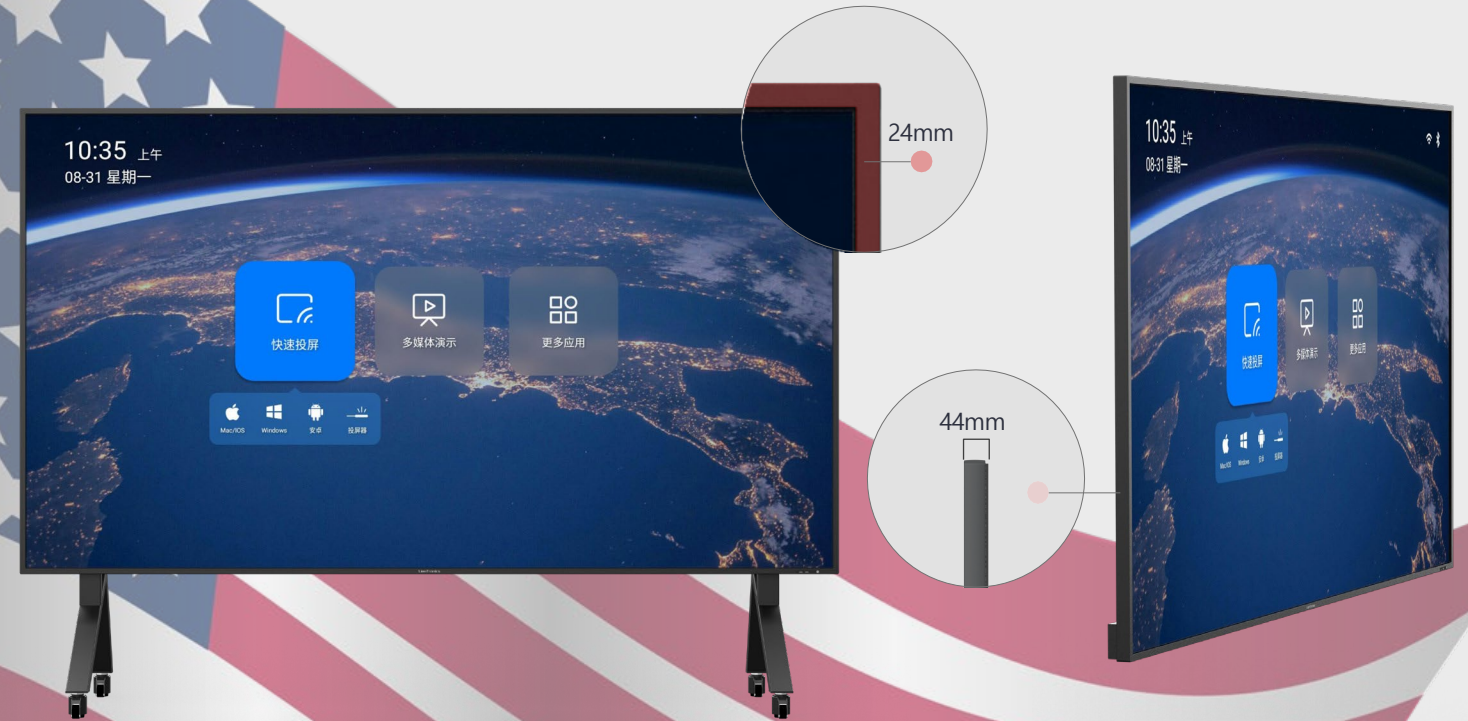

AMERICAN
LED WALL COMPANY

Multifunctional Touchscreen, Smart System

20 touchable points allow writing, circling, and annotating on the whiteboard
Multi-device and multi-system wireless screen mirroring: up to 4 devices casting screens at the same time
Support Android & Windows systems
Easy infrared/bluetooth wireless remote control



Rich Interfaces, Easy Use

Front: Dual USB and power button
Side: Exposed system box and multiple interfaces on the side for convenient connection

